

1/2

	Client		Inetd / wrapper		FTP server
1.	Connect to the FTP port	→	Get the request. Open a port, and get commands.		
2.	Various commands	→	Keep the information in the buffer.		
3.	"USER xxx%aaa.com"	→	Keep only "USER xxx" in the buffer.		
4.			Create an FTP process, for the "xxx" domain.	→	
5.			Finish execution if "wrapper" is an independent process.		
6.					Get commands from the internal buffer. (which seem like arriving from the network).
7.	"PASS" command		→		Verify the password.
8.	Command to download or upload files		→		Handle the commands.

**Fig. 1**

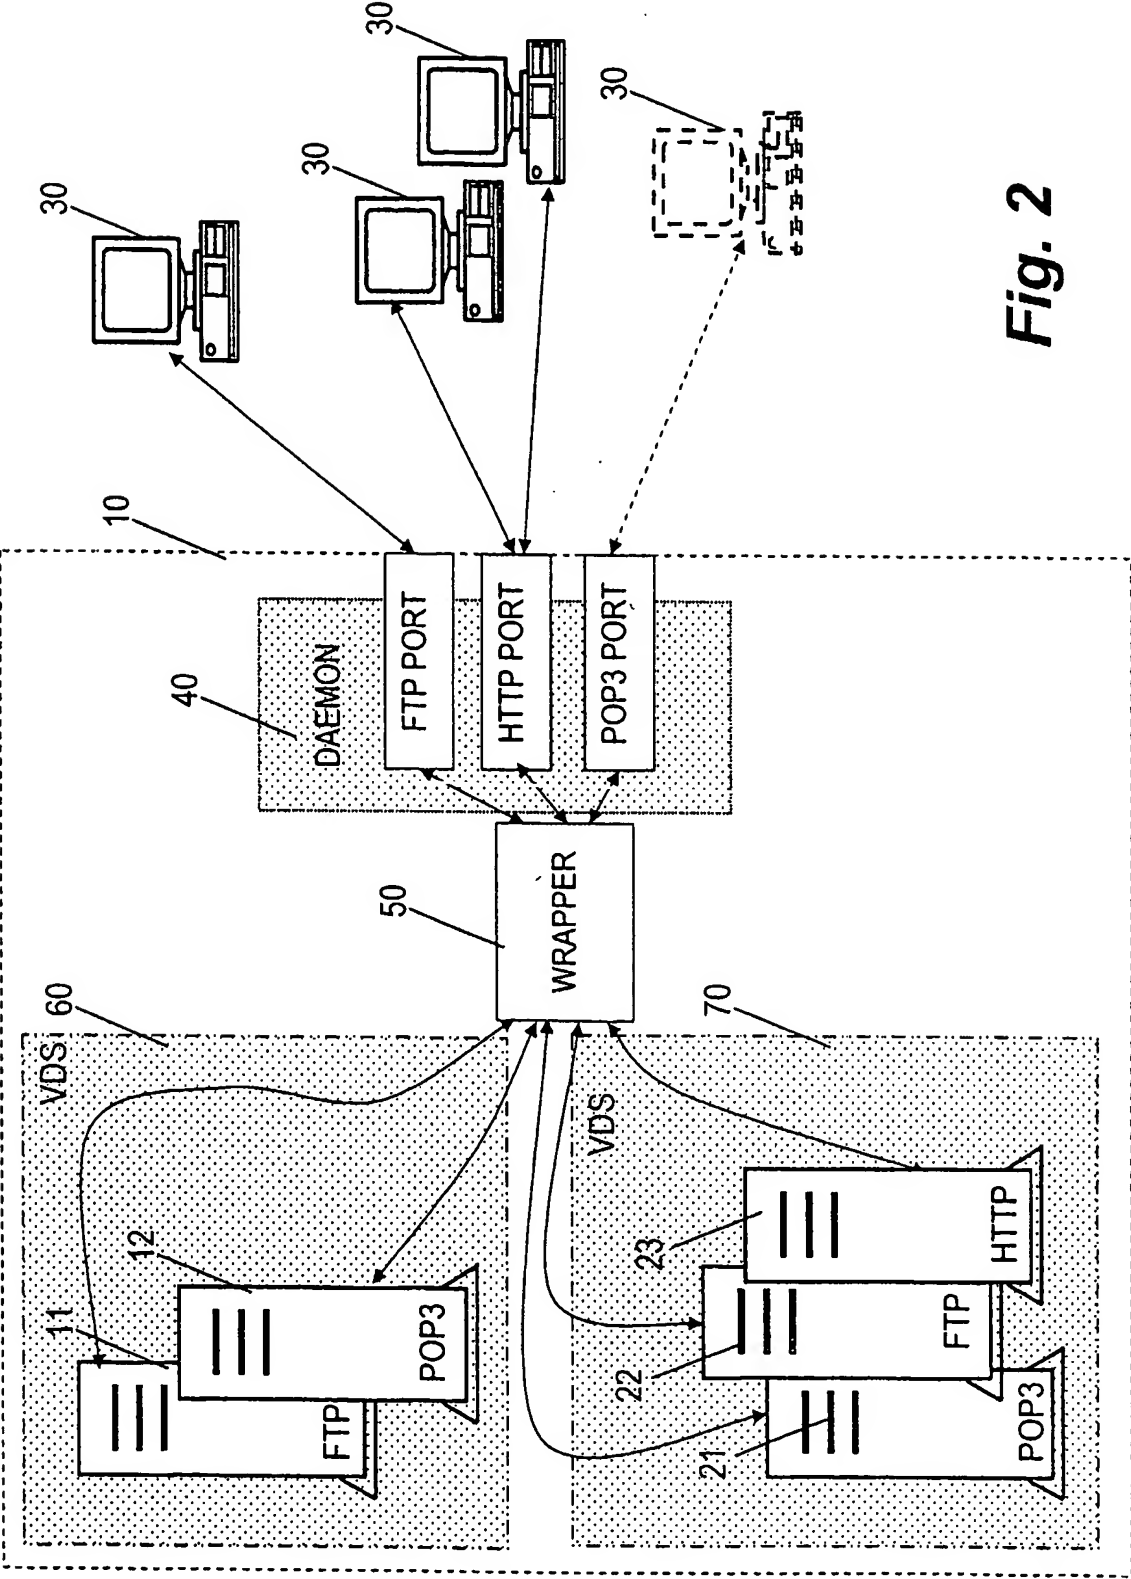


Fig. 2